

The ultra slim profile of CABLED® Side-Lit allows for installation in almost any narrow or limited space that could not be otherwise illuminated.

## Features

- Ultra flexible
- Cut and connect capabilities
- UV Retardant
- Slim profile for sleek design
- Simple plug and play connections

## Benefits

- Perfect for wrap-around, decorative, outlining or any linear applications
- Suitable for outdoor advertising signage
- Easy mounting solutions



\* Premold custom-made connector for IP68 is available.

CABLED® SERIES

## Specifications

Product Name	CABLED® Side-Lit			
Color	Red	Green	Blue	Amber
Wave Length	615nm-625nm	520nm-525nm	465nm-470nm	588nm-594nm
Input Voltage	12V DC			
Rated Current (per meter)	0.25A			
Lumen Output (per meter)	Red: 65lm / Green: 175lm / Blue: 40lm / Amber: 55lm			
Total Power (per meter)	3W			
Radiation Angle	90°			
Min. Bending Radius	60mm			
Max. Connection Length	5m			
Life Span	35,000hrs			
Operating Temperature	-20°C ~ +50°C			
Storage Temperature	-25°C ~ +60°C			
Max. Loading Force	2kg			
Flammability	Flame Retardant			
Application	Indoor / Outdoor			
IP Rating	IP20 / IP65 / Max. IP68			
Dimmable	Yes			
RoHS	Yes			

## Mechanical

Dimension	12mm(W) x 3.6mm(H)
Segment Cut Length	60mm
Number of LEDs	3 LEDs per Segment
LED Pitch	20mm
Weight (per ft / per m)	64 g/m

## Material

Housing	UV / IR Protected, RoHS Compliant
Housing Color	Transparent












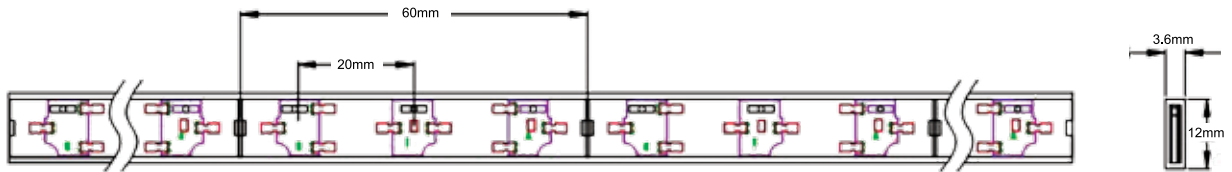


### Applications

- Back lighting panel
- Edge lighting
- Halo Illumination
- Signage applications
- Ideal for architectural lighting decoration

CABLED® SERIES

### Actual product picture and dimensions



										
---	---	---	---	---	---	---	---	--	---	---

### 2000SF Accessories

#### Connectors



#### Mountings and others



\* Coming soon. Special order only.