



The ultra slim profile of 2000SF allows for installation in almost any narrow or limited space that could not be otherwise illuminated.

Features

- Ultra flexible
- Cut and connect capabilities
- Slim profile for sleek design
- Simple plug and play connections

Benefits

- Perfect for wrap-around, decorative, outlining or any linear applications
- Perfect for long lengths application
- Suitable for narrow space installation
- Easy mounting solutions



CABLED® SERIES

Specifications

2000SF LED Strip 8W	
Product Name	2000SF LED Strip 8W
Model	C2K-XX-24H25BT C2K-XX-27H25BT C2K-XX-30H25BT C2K-XX-40H25BT C2K-XX-65H25BT
Part No.	2127242512 2127272512 2127302512 2127402512 2127652512
Color	Special Warm White Warm White Bright White Natural White Daylight
Color Temp (CCT)	2400K 2700K 3000K 4000K 6500K
Color Rendering Index (CRI)	80Ra
Input Voltage	24V DC
Rated Current	54mA per segment
Lumen Output (per meter)	680 lm 720 lm 800 lm
Total Power (per meter)	8W
Lumen Efficacy	85lm/W 92lm/W 100lm/W
Radiation Angle	110°
Min. Bending Radius	60mm
Max. Connection Length	10m
Life Span	35,000hrs
Operating Temperature	-20°C ~ +50°C
Storage Temperature	-25°C ~ +60°C
Max. Loading Force	2kg
Flammability	Flame Retardant
Application	Indoor / Outdoor
IP Rating	IP20 / IP65 / Max. IP68
Dimmable	Yes (1-10V)
RoHS	Yes

Mechanical

Dimension	12mm(W) x 3.4mm(H)
Segment Cut Length	175mm
Number of LEDs	7 LEDs per Segment
LED Pitch	25mm
Weight (per ft / per m)	75 g/m

Material


Housing	UV / IR Protected, RoHS Compliant
Housing Color	White





Applications

- Cove lighting
- Under cabinet
- Task lighting

Luminous Intensity Distribution Diagram

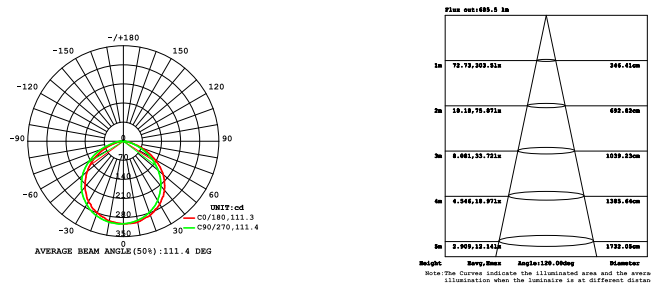

Actual product picture and dimensions

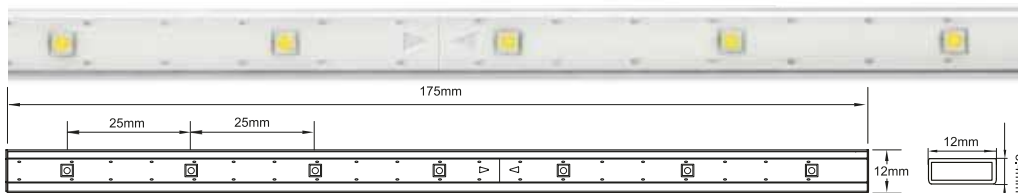

2000SF Accessories

Connectors



Mountings and others



* Coming soon. Special order only.