

CABLED® - 2000SF High Performance



Light Engine

The ultra slim profile of 2000SF allows for installation in almost any narrow or limited space that could not be otherwise illuminated.

Features

- Ultra flexible
- Slim profile for sleek design
- Cut and connect capabilities
- Simple plug and play connections

Benefits

- Perfect for wrap-around, decorative, outlining or any linear applications
- Suitable for narrow space installation
- Perfect for long lengths application
- Easy mounting solutions



CABLED® SERIES

Specifications

2000SF LED Strip 12W & 14W					
Product Name	2000SF LED Strip 12W & 14W				
Color	Special Warm White	Warm White	Bright White	Natural White	Daylight
Color Temp (CCT)	2400K	2700K	3000K	4000K	6500K
Color Rendering Index (CRI)	80Ra				
Input Voltage	24V DC				
Rated Current	12W: 61mA per segment / 14W: 71mA per segment				
Lumen Output (per meter)	12W: 950-1100lm ; 14W: 1100-1250lm				
Total Power (per meter)	12W / 14W				
Lumen Efficacy	80-90 lm/W				
Radiation Angle	110°				
Min. Bending Radius	60mm				
Max. Connection Length	5m				
Life Span	35,000hrs				
Operating Temperature	-20°C ~ +50°C				
Storage Temperature	-25°C ~ +60°C				
Max. Loading Force	2kg				
Flammability	Flame Retardant				
Application	Indoor / Outdoor				
IP Rating	IP20 / IP65 / Max. IP68				
Dimmable	Yes (1-10V)				
RoHS	Yes				

Mechanical

Dimension	12mm(W) x 3.4mm(H)
Segment Cut Length	130mm
Number of LEDs	7 LEDs per Segment
LED Pitch	18mm
Weight	60 g/m

Material

Housing	UV / IR Protected, RoHS Compliant
Housing Color	White


CABLED® - 2000SF High Performance



- Applications
- Cove lighting
 - Task lighting
 - General Illumination

CABLED® SERIES

Actual product picture and dimensions

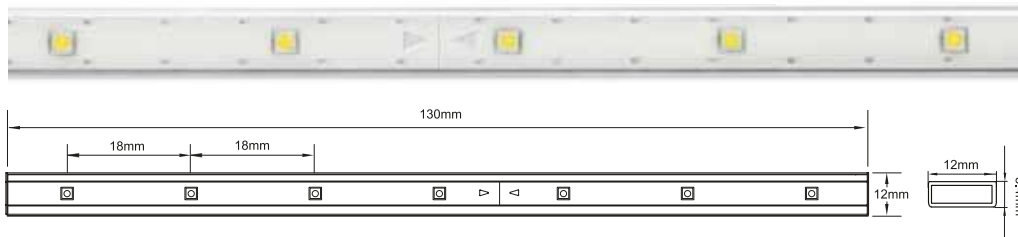

--	--	--	--	--	--	--	--	--	--	--	--	--	--

2000SF Accessories

■ Connectors



■ Mountings and others



* Coming soon. Special order only.